FE-D480-IR-V-FIX

IR Vandal-Proof Fixed Dome Camera

SMART IR | DAY/NIGHT | VANDAL | FIXED LENS

Key Features

- 2 MP high-performance progressive scan CMOS
- Ultra low light: 0.005 Lux, 0 Lux with IR
- 1920 × 1080 resolution, real-time 25/30 fps
- 2.8 mm, 3.6 mm, 6 mm fixed lens options
- EXIR 2.0, Smart IR, up to 30 m IR distance
- OSD menu, 3D DNR, 120 dB true WDR, day/night switch
- 4-in-1 video output (switchable TVI / AHD / CVI / CVBS)
- Vandal-resistant metal housing, IK10
- Weatherproof IP67 for indoor & outdoor use
- 12 VDC power, max. 4.6 W




Type	Night vision	Housing	Order model
Dome · Fixed lens	EXIR 2.0, up to 30 m	Metal, IP67 / IK10	FE-D480-IR-V-FIX

Specification

Kategori	Parameter	Spesifikasi
Camera	Image sensor	2.0 megapixel progressive scan CMOS
	Signal system	PAL / NTSC
	Resolution	1920 (H) × 1080 (V)
	Frame rate	PAL: 1080p@25fps / NTSC: 1080p@30fps
	Min. illumination	0.005 Lux @ (F1.2, AGC ON), 0 Lux with IR
	Shutter time	PAL: 1/25 s to 1/50,000 s / NTSC: 1/30 s to 1/50,000 s
	Slow shutter	Max. 16 times
	Synchronization	Internal synchronization
	Day & Night	IR-cut filter (ICR)
	WDR	≥ 120 dB
Lens	Lens type	Fixed, 2.8 mm / 3.6 mm / 6 mm
	Horizontal field of view	106° (2.8 mm), 82° (3.6 mm), 51° (6 mm)
	Lens mount	M12
	Angle adjustment	Pan: 0° to 355°, Tilt: 0° to 75°, Rotation: 0° to 355°
Illuminator	IR type	EXIR 2.0, Smart IR
	IR range	Up to 30 m
Menu / Image	AGC	High / Medium / Low
	D/N mode	Auto / Color / B/W (Black and White)
	Image mode	STD / HIGH-SAT
	BLC / HLC	Yes / Yes
	3D DNR	Level 1 to 9
	Functions	Brightness, Sharpness, 3D DNR, Mirror, Smart IR
	OSD language	English
Interface	Video output	1 HD analog output
	Output switch	TVI / AHD / CVI / CVBS
General	Power supply	12 VDC ± 25%
	Power consumption	Max. 4.6 W
	Operating conditions	-40 °C to 60 °C (-40 °F to 140 °F), humidity 90% or less (non-condensing)
	Protection level	IP67, IK10 vandal-proof
	Material	Metal
	Dimensions	Ø 111 mm × 82.4 mm (Ø 4.4" × 3.2")
	Weight	Approx. 374 g (0.82 lb)

Specifications are subject to change without notice.

Dimension

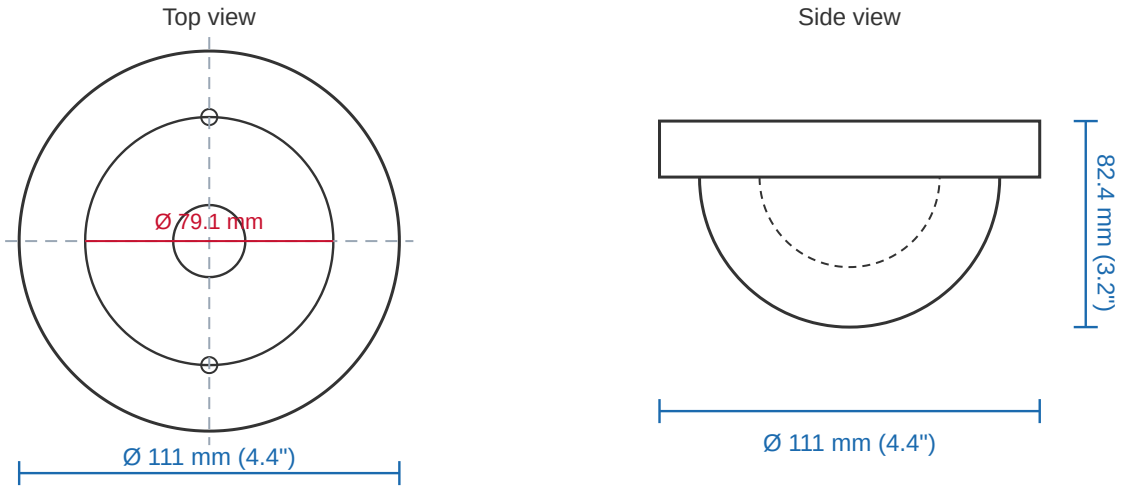

Accessory



FE-1272ZJ-110
Wall Mount



FE-1271ZJ-110
Pendant Mount



FE-1280ZJ-DM18
Junction Box



FE-1275ZJ-SUS
Vertical Pole Mount

ORDER MODEL

FE-D480-IR-V-FIX